

B


TROLLEYBUS ŠKODA 32TR TALLINN TWO-AXLE 12M LOW-FLOOR



TWO-AXLE 12M LOW-FLOOR TROLLEYBUS ŠKODA 32TR

KEY FEATURES

- | **100% low-floor design** – Full accessibility for passengers with reduced mobility
- | Fully compliant with applicable EU General Safety Regulation (GSR) and Cybersecurity (CySe) requirements.
- | **Electrically operated fold-out ramp** for wheelchair users and strollers integrated in the middle door
- | **Regenerative braking** – Energy recovery during braking for battery recharge or grid return
- | **NMC (liquid-cooled) traction battery** – high energy density, stable performance and long lifecycle
- | **Plug-in charging (CCS 2)**
- | **Advanced diagnostics** – All systems accessible via onboard diagnostic computer
- | **Automatic Passenger Counting (APC)**
- | **Hill Holder & Door brake functions** – Prevents rollback and ensures safety during boarding
- | **Traction motor:** ŠKODA 160 kW (asynchronous motor, air-forced cooling)
- | **Power Container:** ŠKODA (traction inverter, auxiliary inverters, 24 V charger)
- | **Insulation Monitoring:** ŠKODA insulation detector
- | **Current Collector:** Semi-automatic (push-button operated)
- | **Contact network voltage:** 600 V DC or 750 V DC

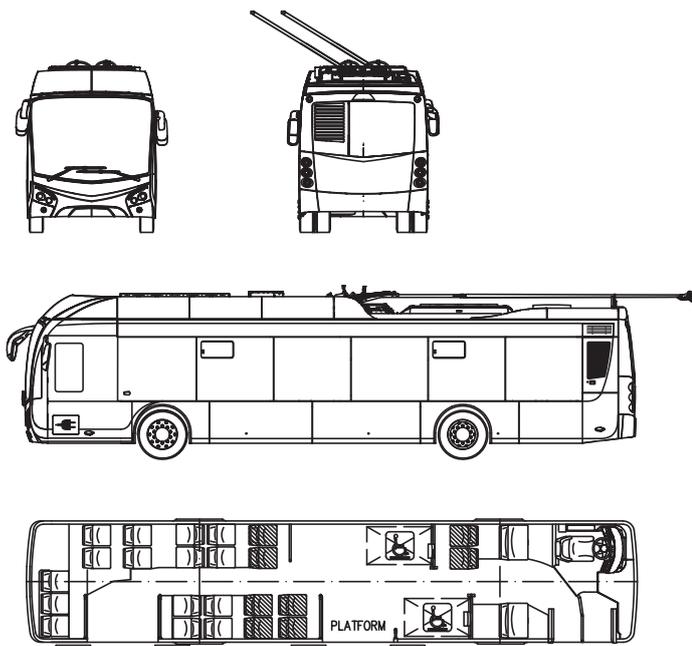

BASIC TECHNICAL PARAMETERS

Parameters	Value
Dimensions (L×W×H)	12,000×2,550×3,500 mm
Passenger Capacity	69 (24 seated + 45 standing)
Traction Motor	1×160 kW
Battery Technology	NMC (liquid-cooled)
Battery Capacity	110 kWh
Off-wire Operation	Up to 25 km off-wire operation
Door Configuration	2-2-2 (front inward-swinging, middle and rear sliding outward)
Suspension System	ECAS with kneeling and lifting
Maximum Speed	65 km/h (software adjustable)
Diagnostics & Monitoring	On-board diagnostics incl. ABS, ECAS, etc.

